



www.foliled.com
info@foliled.com
+44(0)131 452 2024



DOWNLIGHT DATASHEET

FOLI1131C-LED

FOLI1131C-LED

The product is made of aluminium alloy through die-casting, shaped by CNC machine, then treated by power coating. LED driver is installed externally. COB LED or LED QR-CB51 or QR-CB51 light source is used, the radiation angle is nonadjustable. 50,000 hours lamp life at 50°C

Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.

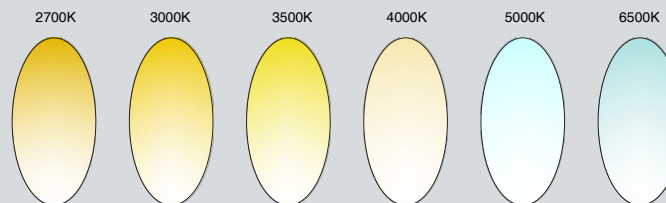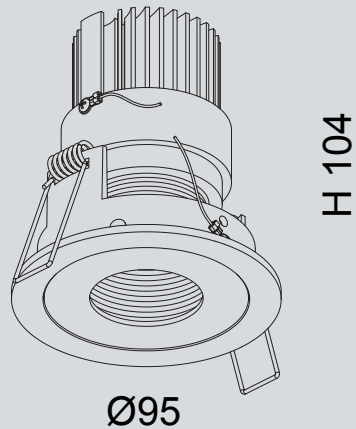

LED 10W	cd/Klm	Beam Angle: 19.9°	
60°	600	1 m 2872 lx	0.35 m
60°	1200	2 m 718.0 lx	0.70 m
30°	1800	3 m 319.1 lx	1.04 m
30°	2400	4 m 179.5 lx	1.39 m
30°	3000	5 m 114.9 lx	1.74 m
High illuminance		Diameter	



10W Chip at DC 36V
(Available with 7W Chip)



With 250mA LED Driver



220V/50hz (excl. 100V~240V/60Hz)



750 lm



Optional Dimming



83mm

