



www.foliled.com
info@foliled.com
+44(0)131 452 2024

DOWNLIGHT DATASHEET



FOLILL3205-LED



The main body parts are made of aluminium alloy and then shaped by CNC machines. The surface is treated by powder-coating.

The reflector is heat-resistant and anti-glare. Following long use it reflector and reflectance will not decay. 50,000 hours lamp life at 50°C

Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.

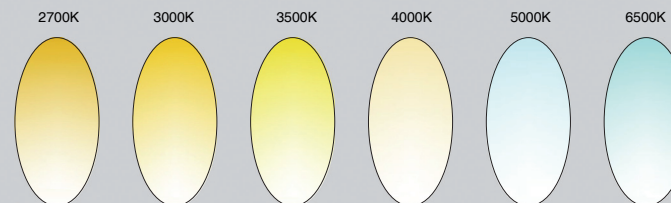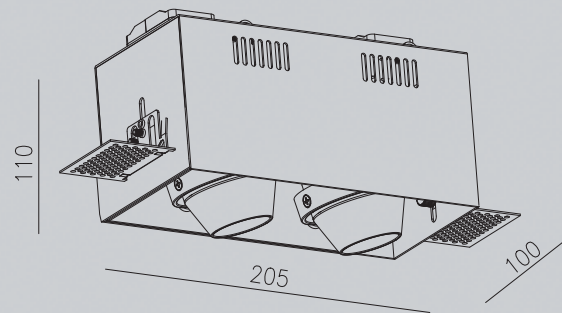

LED 2 x 7W		cd/KLm	Beam Angle: 24.58°	
60°	700	60°	1 m	3290 lx
	1400		2 m	822.5 lx
	2100		3 m	365.5 lx
	2800		4 m	205.6 lx
30°	3500	30°	5 m	131.6 lx
		High Illuminance	Diameter	

2 x 7W LED Chip

With 200mA LED Driver

220V/50hz

1269lm

Optional Dimming

104 x 209mm

