



www.foliled.com  
info@foliled.com  
+44(0)131 452 2024

## DOWNLIGHT DATASHEET



### FOLILLC023-LED




The main body parts are made of aluminium alloy and then shaped by CNC machines. The surface is treated by powder-coating.


The reflector is heat-resistant and anti-glare. Following long use it reflector and reflectance will not decay. 50,000 hours lamp life at 50°C


Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.

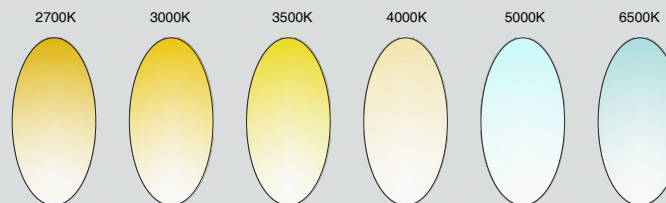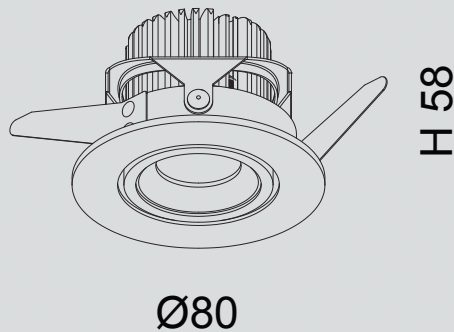


LED 4W	cd/Klm	Beam Angle: 35.4°	
1 m	451.7 lx	0.08 m	
2 m	112.9 lx	0.16 m	
3 m	50.18 lx	0.24 m	
4 m	28.23 lx	0.32 m	
5 m	18.07 lx	0.40 m	
High illuminance		Diameter	

 **4W Chip** (Available with 7W & 10W chip)

 **With 120mA LED Driver**

 **220V/50hz**

 **320 lm**

 **Optional Dimming**

 **70mm**

