

FOLILED RIGID BAR



FOLILED RIGID BAR 16.7MM

Features:

- SMD_5050 LEDs with 16.7mm pitch
- Custom length in multiples of 50mm PCB segment length up to 2 meter
- Various colour temperature options
- 3 years' warranty
- Excellent thermal management
- Clear or frosted diffuser cover
- Available with IP20 or IP68 connectors
- 120° beam angle
- Low energy consumption
- Ambient operation temperature: -20° to 50°C



LED Spacing	Rating	Power Consumption	Lumens Output	Voltage DC
16.7mm	IP20 IP68	14.4 watt/m	1150lm at 8000°K 850lm at 3000°K	12V 24V




COLOUR TEMPERATURE:



BEAM ANGLE & ACCESSORIES:

ANGLE ADJUSTABLE FIXING CLIP

FLAT METAL FIXING CLIP

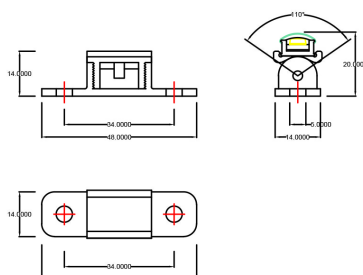


FOLILED RIGID BAR




DETAILED DRAWING AND DIMENSIONS OF FOLILED RIGID BAR:

16.7mm Pitch Rigid LED Bar


LED BAR - PLAN

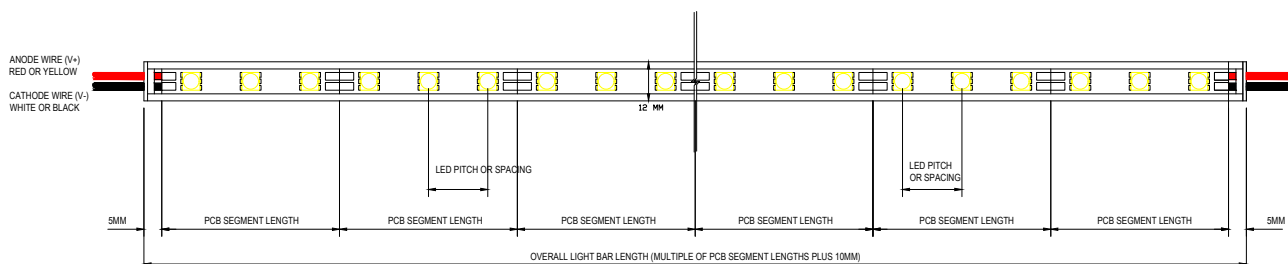

LED BAR - SIDE ELEVATION

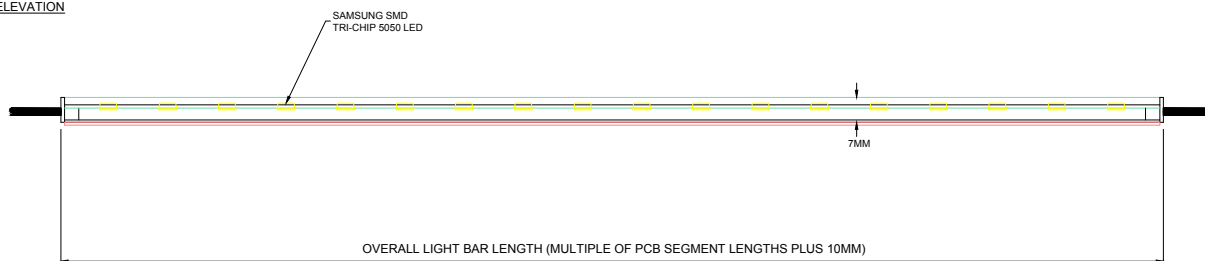

LED BAR - SECTION

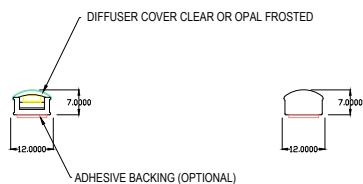

LED BAR - CONNECTION



TYPICAL INSTALLATION:

