


FOLILED RIGID BAR



FOLILED RIGID BAR 16.7 RGBW


Features:

- SMD_5050 LEDs with 16.7mm pitch
- Custom length in multiples of 50mm PCB segment length up to 2 meter
- 3 years' warranty
- Excellent thermal management
- Clear of frosted diffuser cover
- Available with IP20 or IP68 connectors
- 120° beam angle
- Low energy consumption
- Ambient operation temperature: -20° to 50°C

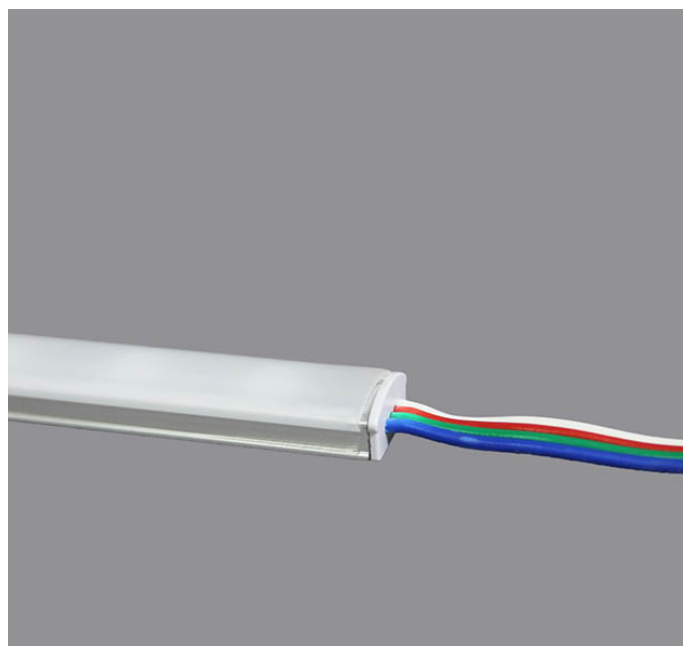


LED Spacing	Rating	Power Consumption	Lumens Output	Voltage DC
16.7mm	IP20 IP68	14.4 watt/m	Red: 150lm Green: 260lm Blue: 190lm	12V 24V


COLOUR TEMPERATURE & ACCESSORIES:




BEAM ANGLE:



ANGLE ADJUSTABLE FIXING CLIP

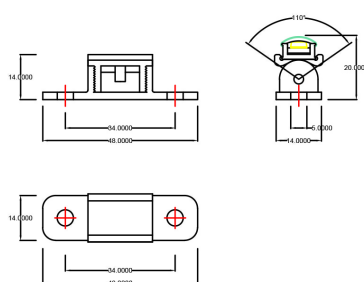

FLAT METAL FIXING CLIP

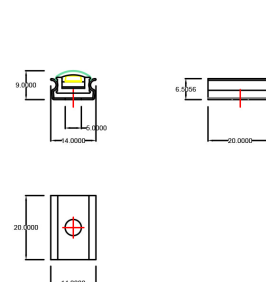


FOLI LED RIGID BAR


DETAILED DRAWING AND DIMENSIONS OF FOLI LED RIGID BAR:

RGBW 16.7mm Pitch Rigid LED Bar


LED BAR - PLAN

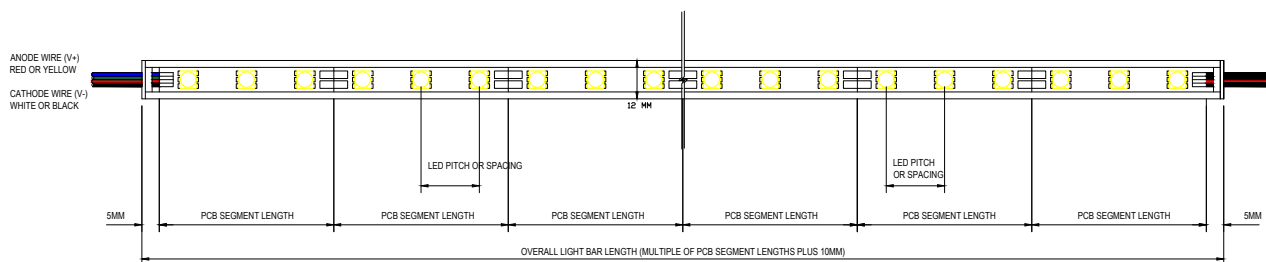

LED BAR - SIDE ELEVATION

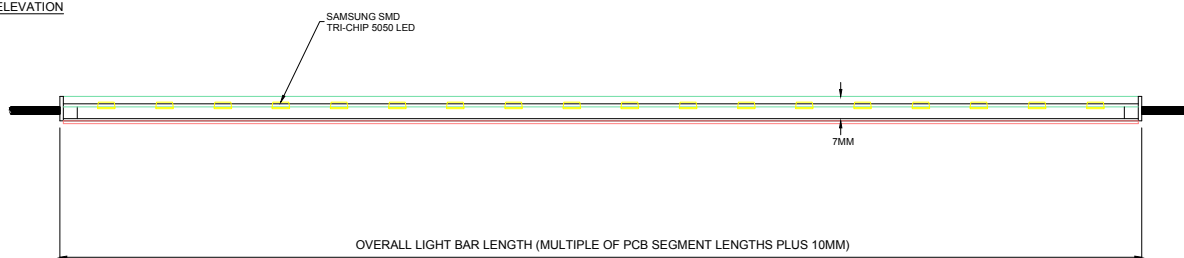

LED BAR - SECTION

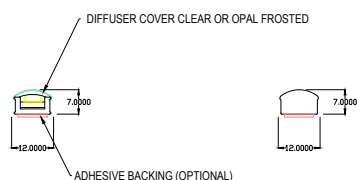

LED BAR - CONNECTION



TYPICAL INSTALLATION:

