

FOLILED RIGID BAR



FOLILED RIGID BAR 8.3MM


Features:

- SMD_5050 LEDs with 8.3mm pitch
- Custom length in multiples of 50mm PCB segment length up to 1.2 meters
- 3 years' warranty
- Excellent thermal management
- Clear of frosted diffuser cover
- Available with IP20 or IP68 connectors
- 120° beam angle
- Low energy consumption
- Ambient operation temperature: -20° to +50°C



LED Spacing	Rating	Power Consumption	Lumens Output	Voltage DC
8.3mm	IP20 IP68	28.8 watt/m	2040lm at 8000°K 1830lm at 3000°K	12V 24V




COLOUR TEMPERATURE:

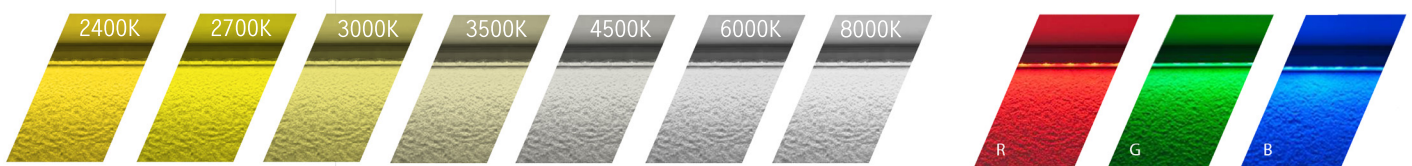

BEAM ANGLE & ACCESSORIES:

ANGLE ADJUSTABLE FIXING CLIP - 8.3mm pitch bar

FLAT METAL FIXING CLIP - 8.3mm pitch bar

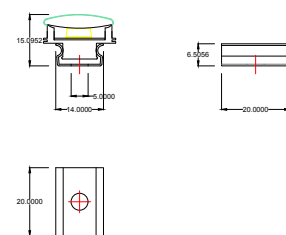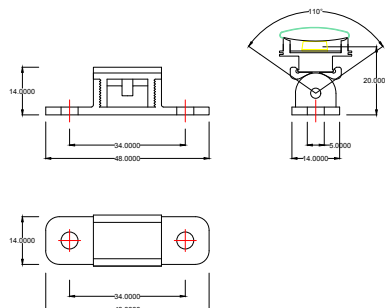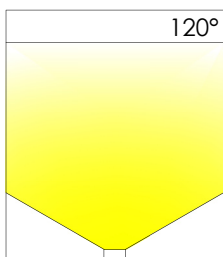




FOLILED RIGID BAR


DETAILED DRAWING AND DIMENSIONS OF FOLILED RIGID BAR:

8.3mm Pitch Rigid LED Bar


LED BAR - PLAN

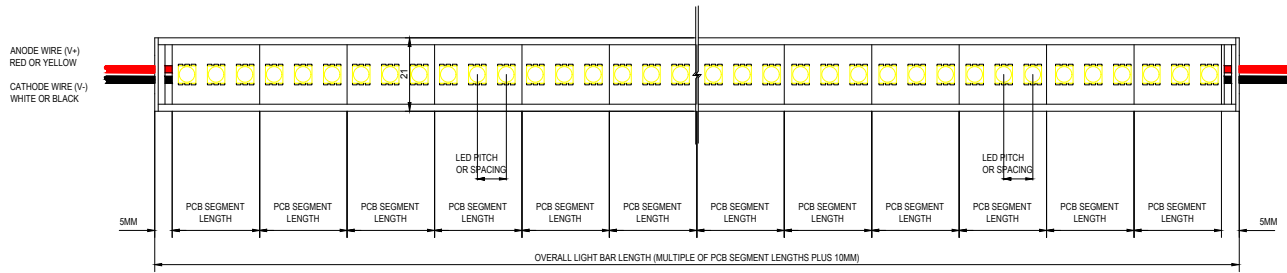


LED BAR - SIDE ELEVATION

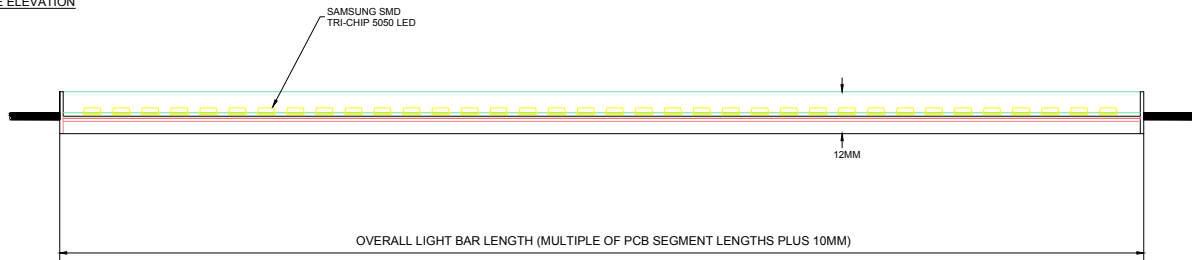

LED BAR - SECTION

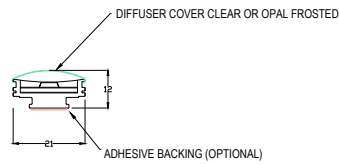

LED BAR - CONNECTION



TYPICAL INSTALLATION:

