



www.foliled.com  
info@foliled.com  
+44(0)131 452 2024

## DOWNLIGHT DATASHEET



### FOLI3301-LED



The main body parts are made of aluminium alloy and then shaped by CNC machines. The surface is treated by powder-coating.

The reflector is heat-resistant and anti-glare. Following long use it reflector and reflectance will not decay. 50,000 hours lamp life at 50°C

Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.

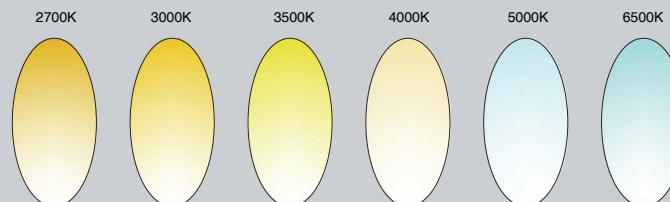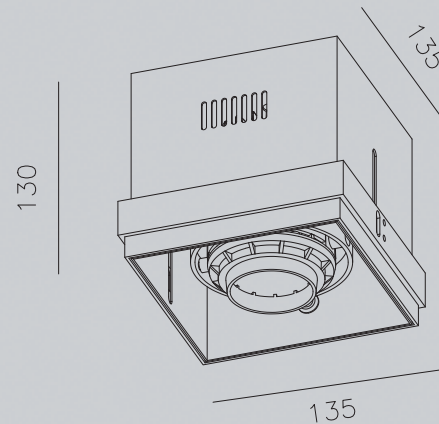

LED 15W	cd/Klm	Beam Angle: 23.23°	
60°	800	1 m 3869 lx	0.41 m
60°	1600	2 m 967.2 lx	0.82 m
30°	2400	3 m 429.9 lx	1.23 m
30°	3200	4 m 241.8 lx	1.64 m
30°	4000	5 m 154.8 lx	2.06 m
High illuminance		Diameter	

15W LED Chip

With 400mA LED Driver

220V/50hz

1071lm

Optional Dimming

137 x137mm

