

WE ARE FOLILED!

WE CREATE BESPOKE LIGHTING! WE LOVE TO DESIGN!

MAIN OFFICE CONTACT:

FoliLED

One St. Colme Street Edinburgh, EH3 6AA

+44 (0)131 452 2024 info@foliled.com www.foliled.com


ABOUT US


FOLILED is a dynamic company that offers complete solutions for innovative and quality lighting using modern LED technology. When it comes to lighting we understand and recognise that new technology and ideas go hand in hand and with our experience we are able to give a complete lighting solution to any projects however big or small.

The company was founded in 2014 following extensive research of the lighting market. Since then we have developed high-quality products with an emphasis on linear and downlight fittings. Our products cover a large range from residential to industrial projects and from indoor to outdoor spaces. We have multiple product choices to fulfil our customer's needs and expectations. Being a UK based company **FOLILED** specialises in both contemporary and traditional work, there is no limit to our lighting solutions.

We insist on quality and innovation from the initial concepts to development, from production to installation, from sales to support in order to ensure our clients receive the best experience and results.

We work with our customers and partners continuously on developing the future of light. The goal of providing the best light for you and the environment is one that we take seriously. Our products are effective and eco-friendly, they help to reduce the carbon footprint and your every day running costs. Our knowledge and attention to detail is one we pride ourselves on and you can most certainly rely on us to design and build whatever you've envisioned, we will make your project come alive.

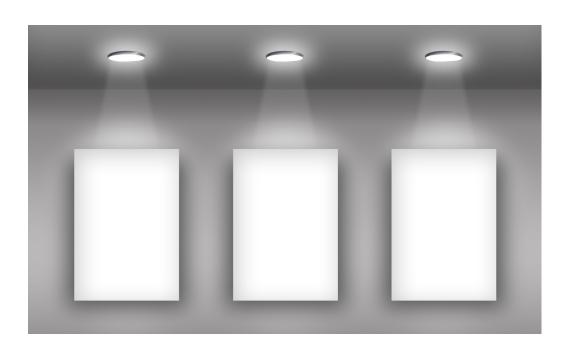

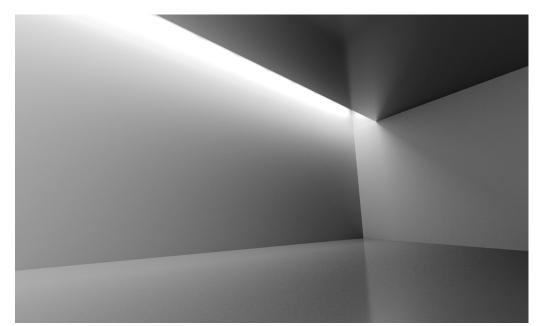

INTERIOR DOWNLIGHTS

FOLI1149C-LED

Page 14

FOLILL3205-LED

Page 22





Page 32

Page 33

Page 34


Page 35

Page 36

Page 37





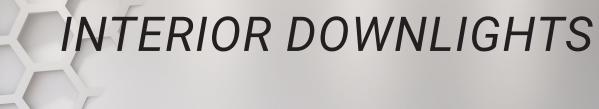

The products are made of aluminium alloy through die-casting, shaped by CNC machine, then treated by powder coating. The reflectors are heat-resistant and anti-glare meaning the fittings will not discolour over time and the reflectance will not decay either.

Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, clubs, etc.

FOLI11005YS-LED







The main body parts are made of aluminium alloy and then shaped by CNC machines. The surface is treated by powder-coating.


The reflector is heat-resistant and anti-glare. Following long use it reflector and reflectance will not decay. 50,000 hours lamp life at 50°C

Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.



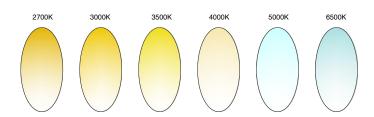

LED 15W	cd/KLm			Beam Angle: 18.4°
	Z.	1 m	6198 lx	0.32 m
60° × 7 / 1	1300 60°	2 m	1550 lx	0.64 m
又学特	2600	3 m	688.7 lx	0.96 m
[- 3900	4 m	387.4 lx	1.28 m
30°		5 m	247.9 lx	1.61 m
	5200 30° 6500	High	illuminance	Diameter



LED 15W	cd/KLm			Beam	Angle: 42.2°
	1	1 m	2001 lx		0.77 m
60°	60°	2 m	500.1 lx	\	1.54 m
80	対 ():/1	3 m	222.3 lx	}	2.32 m
/ /	00	4 m	125.0 lx	\supset	3.09 m
30°	1	5 m	80.02 lx	\leq	3.86 m
20	7 : 1	High	illuminance		Diameter



With 350mA LED Driver

220V/50hz (excl. 100V~240V/60Hz)

















FOLI1113Y-7W






The lighting body is made of aluminium alloy through die-casting, shaped by CNC machine, then treated by powder coating. Reflector is made of special alloy through die-casting and treated by special technics, heat-resistant and anti glare. Fixed fitting.

Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.

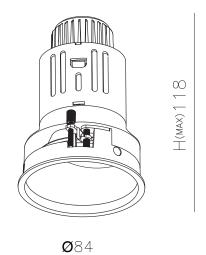

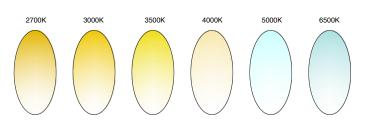





→ AC 12V/50Hz










Optional Dimming





FOLI1122C-LED



The main body parts are made of aluminium alloy and then shaped by CNC machines. The surface is treated by powder-coating.


The reflector is heat-resistant and anti-glare. Following long use it reflector and reflectance will not decay. 50,000 hours lamp life at 50°C


Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.

100

 $_{\perp}$



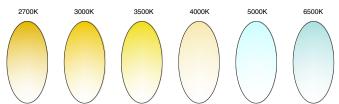

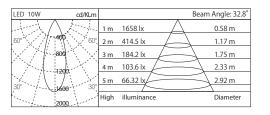

cd/KLm		Beam	Angle: 24.0°
	1 m	2348 lx	0.42 m
-500 60°	2 m	587.11 lx	0.84 m
1000	3 m	260.91 lx	1.27 m
1500	4 m	146.8 lx	1.69 m
2000- 30°	5 m	93.93 lx	2.11 m
2500	High	illuminance	Diameter

10W Chip (Available with 7W Chip)

With 250mA LED Driver

220V/50hz (excl. 100V~240V/60Hz)

₩ 750 lm

Optional Dimming

170mm












FOLI1131C-LED






The product is made of aluminium alloy through die-casting, shaped by CNC machine, then treated by podwer coating. LED driver is installed externally. COB LED or LED QR-CB51 or QR-CB51 light source is used, the radiation angle is nonadjustable. 50,000 hours lamp life at 50°C

Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.

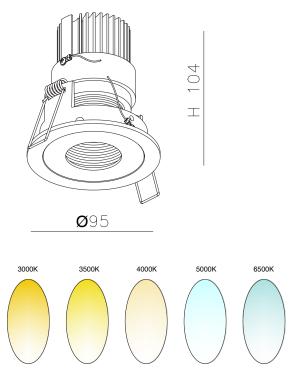


2700K

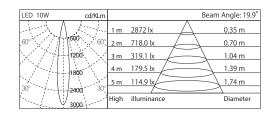



















FOLI1134C-LED








The main body parts are made of aluminium alloy and then shaped by CNC machines. The surface is treated by powder-coating.


The reflector is heat-resistant and anti-glare. Following long use it reflector and reflectance will not decay. 50,000 hours lamp life at 50°C

Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.



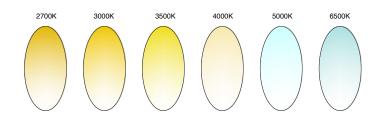


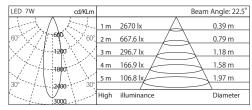










647 lm

Optional Dimming

102mm





12



FOLI11403Y-LED








The main body parts are made of aluminium alloy and then shaped by CNC machines. The surface is treated by powder-coating.

The reflector is heat-resistant and anti-glare. Following long use it reflector and reflectance will not decay. 50,000 hours lamp life at 50°C

Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.

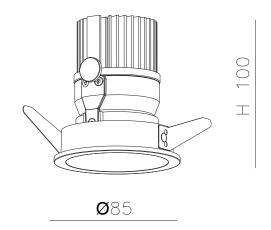

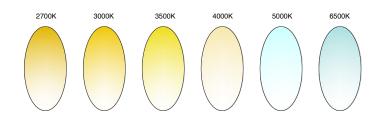

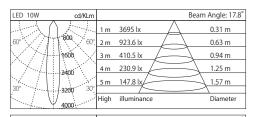

LE	D 10W	cd/KLm			Beam	Angle: 26.2°
	+3,	\wedge	1 m	2220 lx	Δ	0.46 m
60	°×/1	7. 500 > 60°.	2 m	555.1 lx	\rightarrow	0.93 m
1	₹74	1000	3 m	246.7 lx	=	1.39 m
ľ	<i>></i> -4.	1500	4 m	138.8 lx	\longrightarrow	1.85 m
30	£./\		5 m	88.82 lx	3	2.32 m
K	1		High	illuminance		Diameter
L		2500				

LED 10W	cd/KLm			Beam	Angle: 36.9°
AA/	$\backslash L / $	1 m	1465 lx		0.66 m
60° \$\frac{1}{1}	300	2 m	366.2 lx		1.32 m
\times $\!$	600	3 m	162.8 lx	}	1.98 m
	900	4 m	91.55 lx	\rightarrow	2.65 m
	1200 30°	5 m	58.59 lx	\leq	3.31 m
$K_{\bullet}/\sqrt{1}$	7290	High	illuminance		Diameter



With 250mA LED Driver

→ 220V/50hz


₩ 835 lm

Optional Dimming









FOLI1149C-LED








The main body parts are made of aluminium alloy and then shaped by CNC machines. The surface is treated by powder-coating.

The reflector is heat-resistant and anti-glare. Following long use it reflector and reflectance will not decay. 50,000 hours lamp life at 50°C

Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.

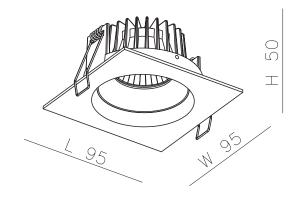


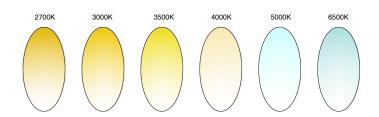

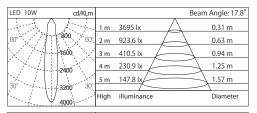

	LED 10W	cd/KLm			Beam.	Angle: 26.2°
	4-3.0	7	1 m	2220 lx		0.46 m
	60°	500 × 60°	2 m	555.1 lx		0.93 m
Ì	\times $?$	1000	3 m	246.7 lx	}	1.39 m
Ì	17441	1500	4 m	138.8 lx	\supset	1.85 m
İ	300	-2000 30°	5 m	88.82 lx	\leq	2.32 m
	·/	2500	High	illuminance		Diameter

LED 10W	cd/KLm				Beam /	Angle: 36.9°
	\ <i>X</i> :-}	1 m	1465 lx	\triangle		0.66 m
60°	300 60°	2 m	366.2 lx	\rightarrow		1.32 m
\times	560g	3 m	162.8 lx		<u></u>	1.98 m
	900	4 m	91.55 lx		7	2.65 m
300	30°	5 m	58.59 lx		=	3.31 m
$\mathbb{K}_{+}/\mathbb{V}$	200 30°	High	illuminan	ce		Diameter



With 250mA LED Driver

→ 220V/50hz




Optional Dimming











FOLI22003Y-LED








The main body parts are made of aluminium alloy and then shaped by CNC machines. The surface is treated by powder-coating.

The reflector is heat-resistant and anti-glare. Following long use it reflector and reflectance will not decay. 50,000 hours lamp life at 50°C

Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.

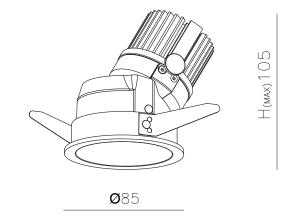

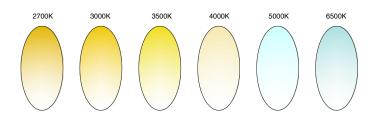

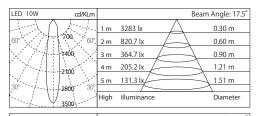

LED 10W	cd/KLm				Beam	Angle: 25.0°
	1	1 m	2124 lx	A		0.44 m
60°	500 > 60°	2 m	531.1 lx	-	\	0.89 m
\times	1000	3 m	236.0 lx	\angle	}	1.33 m
()>:41.	1500	4 m	132.8 lx		\rightarrow	1.78 m
30°	-2000 30°	5 m	84.97 lx		\leq	2.22 m
	2000	High	illuminand	ie .		Diameter
7	2500					

LED 10W	cd/KLm			Beam Angle: 35.2°
4-3/	1	1 m	1519 lx	0.62 m
60°	-400 60°	2 m	379.8 lx	1.25 m
N/ 24	-800	3 m	168.8 lx	1.87 m
()X.A.	1200	4 m	94.95 lx	2.50 m
	ストンビ	5 m	60.77 lx	3.12 m
30° ``-	1600 30°			
Sand.	2000	High	illuminance	Diameter



With 250mA LED Driver

220V/50hz


₩ 835 lm

Optional Dimming












FOLI2224C-LED





The main body parts are made of aluminium alloy and then shaped by CNC machines. The surface is treated by powder-coating.

The reflector is heat-resistant and anti-glare. Following long use it reflector and reflectance will not decay. 50,000 hours lamp life at 50°C

Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.



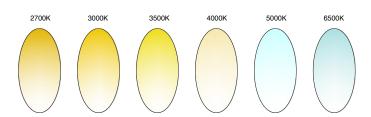

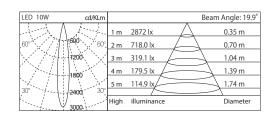




















FOLI3301Y-7W







The main body parts are made of aluminium alloy and then shaped by CNC machines. The surface is treated by powder-coating.

The reflector is heat-resistant and anti-glare. Following long use it reflector and reflectance will not decay. 50,000 hours lamp life at 50°C

Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.



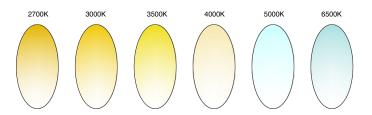



With 250mA LED Driver

← AC 12V/50Hz
















FOLILLC023-LED





The main body parts are made of aluminium alloy and then shaped by CNC machines. The surface is treated by powder-coating.

The reflector is heat-resistant and anti-glare. Following long use it reflector and reflectance will not decay. 50,000 hours lamp life at 50°C

Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.

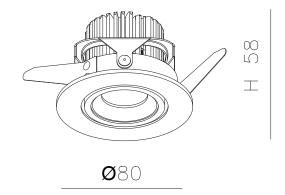

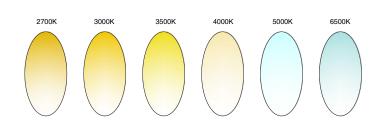

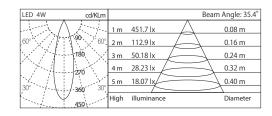




With 120mA LED Driver

→ 220V/50hz

¾ 320 lm















FOLILLC022-LED





The main body parts are made of aluminium alloy and then shaped by CNC machines. The surface is treated by powder-coating.

The reflector is heat-resistant and anti-glare. Following long use it reflector and reflectance will not decay. 50,000 hours lamp life at 50°C

Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.

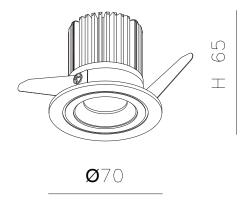

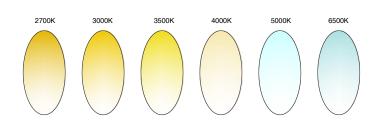

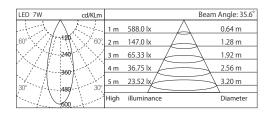





















F0L16643-LED




The main body parts are made of aluminium alloy and then shaped by CNC machines. The surface is treated by powder-coating.

The reflector is heat-resistant and anti-glare. Following long use it reflector and reflectance will not decay. 50,000 hours lamp life at 50°C

Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.



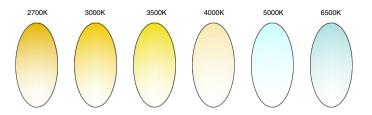


LED 25W	cd/KLm			Beam Angle: 26.04°
43/	125	1 m	6983 lx	0.46 m
60°	1400 600	2 m	1746 lx	0.93 m
\x/ <i>}</i> \	2800	3 m	775.9 lx	1.39 m
1 ×4	4200	4 m	436.4 lx	1.85 m
30°	-5600 30°	5 m	279.3 lx	2.31 m
	1 0000	High	illuminance	Diameter





With 700mA LED Driver


220V/50hz














FOLI3301-LED




The main body parts are made of aluminium alloy and then shaped by CNC machines. The surface is treated by powder-coating.

The reflector is heat-resistant and anti-glare. Following long use it reflector and reflectance will not decay. 50,000 hours lamp life at 50°C

Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.



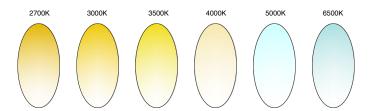

LED 15W	cd/KLm			Beam Angle: 23.23°
4-1	125	1 m	3869 lx	0.41 m
.60°	/800 . 60°	2 m	967.2 lx	0.82 m
\times	1600	3 m	429.9 lx	1.23 m
1 7441	- 2400	4 m	241.8 lx	1.64 m
30°	3200 30°	5 m	154.8 lx	2.06m
	4000	High	illuminance	Diameter




With 400mA LED Driver

220V/50hz















FOLILL3205-LED




The main body parts are made of aluminium alloy and then shaped by CNC machines. The surface is treated by powder-coating.

The reflector is heat-resistant and anti-glare. Following long use it reflector and reflectance will not decay. 50,000 hours lamp life at 50°C

Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.

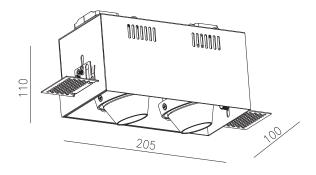

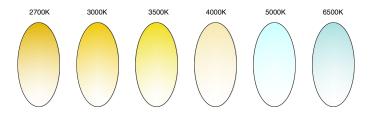

LED 2 x 7W	cd/KLm			Beam Angle: 24.58°
4-14	125-	1 m	3290 lx	0.44 m
60°	700 600	2 m	822.5 lx	0.87 m
\times / \mathbb{H}^+	1400	3 m	365.5 lx	1.31 m
	-2100	4 m	205.6 lx	1.74 m
30°	2800 30°	5 m	131.6 lx	2.18 m
$\subseteq \bigcup V$	3500	High	illuminance	Diameter

2 x 7W LED Chip

With 200mA LED Driver


→ 220V/50hz


₩ 1269lm




Optional Dimming












F0L16647-LED




The main body parts are made of aluminium alloy and then shaped by CNC machines. The surface is treated by powder-coating.

The reflector is heat-resistant and anti-glare. Following long use it reflector and reflectance will not decay. 50,000 hours lamp life at 50°C

Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.

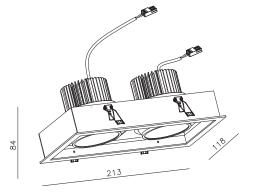

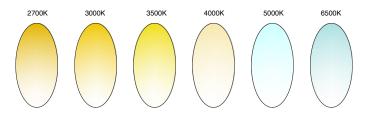

LED 2 x 10W	cd/KLm			Beam Angle: 24.35°
43	X.Y.	1 m	4112 lx	0.43 m
600	900 60°	2 m	1028 lx	0.86 m
\times	1800	3 m	456.9 lx	1.29 m
[]X-41	2700	4 m	257.0 lx	1.73 m
300	-3600 30°	5 m	164.5 lx	2.16 m
	4500	High	illuminance	Diameter
























FOLIMM6210-A





The main body parts are made of cast aluminium. The surface is treated by powder-coating.

The reflector is heat-resistant and anti-glare. Following long use it reflector and reflectance will not decay. 50,000 hours lamp life at 50°C

Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.



10W Chip (Available with 6W Chip)



With 250mA LED Driver





220-240V/50-60Hz





10W at 36° and 2700K = 1004 lm 10W at 36° and 3000K = 1040 lm 10W at 24° and 2700K = 1018 lm 10W at 24° and 3000K = 1054 lm



Optional Dimming

3000K

4000K




83mm


2700K






Ø90

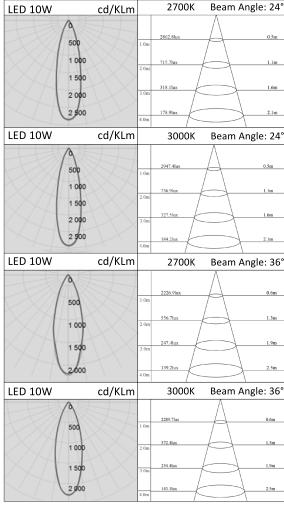









FOLIMM6210-AD1





The main body parts are made of cast aluminium. The surface is treated by powder-coating.

The reflector is heat-resistant and anti-glare. Following long use it reflector and reflectance will not decay. 50,000 hours lamp life at 50°C

Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.



10W Chip (Available with 6W Chip)



With 250mA LED Driver





220-240V/50-60Hz






10W at 36° and 2700K = 1004 lm 10W at 36° and 3000K = 1040 lm 10W at 24° and 2700K = 1018 lm 10W at 24° and 3000K = 1054 lm





Optional Dimming





> 83mm





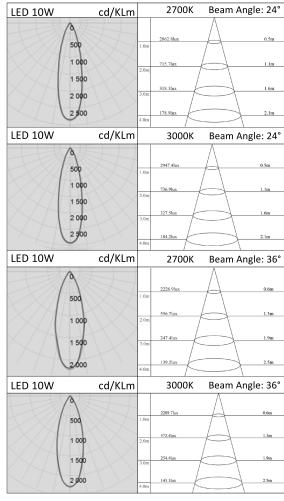







FOLIMM6210-AD2





The main body parts are made of cast aluminium. The surface is treated by powder-coating.

The reflector is heat-resistant and anti-glare. Following long use it reflector and reflectance will not decay. 50,000 hours lamp life at 50°C

Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.







220-240V/50-60Hz




10W at 36° and 2700K = 1004 lm 10W at 36° and 3000K = 1040 lm 10W at 24° and 2700K = 1018 lm 10W at 24° and 3000K = 1054 lm





Optional Dimming




⁹83mm





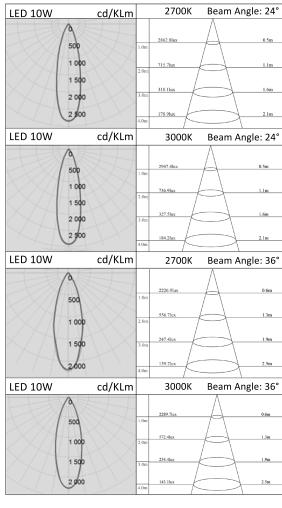








26



FOLIMM6210-DR1





The reflector is heat-resistant and anti-glare. Following long use it reflector and reflectance will not decay. 50,000 hours lamp life at 50°C

Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.



10W Chip (Available with 6W Chip)



With 250mA LED Driver





220-240V/50-60Hz






10W at 36° and 2700K = 1004 lm 10W at 36° and 3000K = 1040 lm 10W at 24° and 2700K = 1018 lm 10W at 24° and 3000K = 1054 lm





Optional Dimming



 \geq 83mm





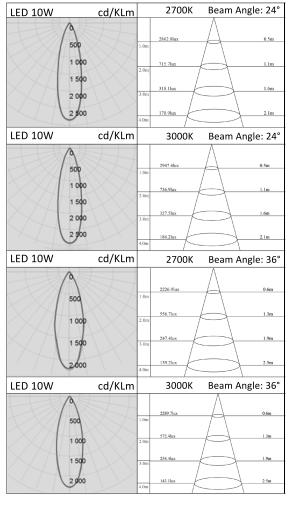











FOLIMM6210-DR2





The main body parts are made of cast aluminium. The surface is treated by powder-coating.

The reflector is heat-resistant and anti-glare. Following long use it reflector and reflectance will not decay. 50,000 hours lamp life at 50°C

Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.










220-240V/50-60Hz
















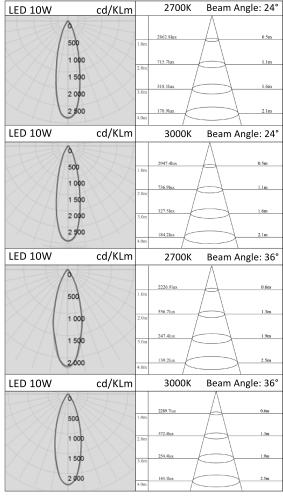







28



FOLIMM6210-F





The main body parts are made of cast aluminium. The surface is treated by powder-coating.

The reflector is heat-resistant and anti-glare. Following long use it reflector and reflectance will not decay. 50,000 hours lamp life at 50°C

Simple design with efficient heat sink, suitable for different applications such as: hotel, villas, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.








220-240V/50-60Hz



10W at 36° and 2700K = 1004 lm 10W at 36° and 3000K = 1040 lm 10W at 24° and 2700K = 1018 lm 10W at 24° and 3000K = 1054 lm












 ∞

2700K Beam Angle: 24° LED 10W cd/KLm 2 000 **LED 10W** cd/KLm 3000K Beam Angle: 24° 2 000 LED 10W cd/KLm 2700K Beam Angle: 36° 1 000 1 500 cd/KLm 3000K Beam Angle: 36° **LED 10W** 1 000 1 500














FOLI-AAM3019-LED

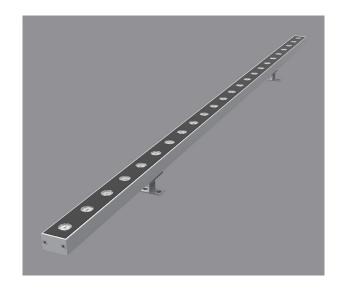



1000/500

Linear LED Lighting with a simple and efficient design ideal for all interior projects such as hotel, villas, clubs, opera houses, museums, exhibition centers, stores, boutiques, homes, etc.

All linear products are eco-friendly with low energy consumption and excellent thermal management allowing energy savings and longer life.

Surface mounted fitting with adjustable bracket. The body is aluminum alloy with die-cast end caps completed with silicone seal. The optical screen is clear glass – 3mm thick. The fitting is equipped with two nickel-finished brass glands and neoprene cable for daisy-chain connection.

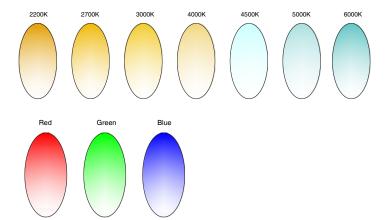







18W



24V



DMX512 and Dali Driver



30°, 60° and 20°- 40°



1511lm @ 4000K



Silver Aluminum, Grey, Black, Customized



Optional Dimming



5 Years Warranty





80% after 50,000 Hours




-30°C to 50°C





FOLI-AAL4028-LED

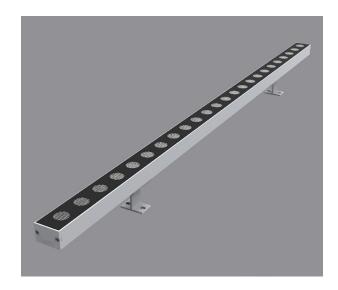



40

Linear LED Lighting with a simple and efficient design ideal for all interior projects such as hotel, villas, clubs, opera houses, museums, exhibition centers, stores, boutiques, homes, etc.

All linear products are eco -friendly with low energy consumption and excellent thermal management allowing energy savings and longer life.

Surface mounted fitting with adjustable bracket. The body is aluminum alloy with die-cast end caps completed with silicone seal. The optical screen is clear glass – 4mm thick. The fitting is equipped with two nickel-finished brass glands and neoprene cable for daisy-chain connection.

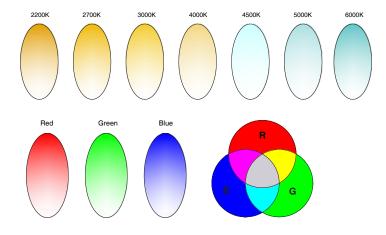





24pcs high power Cree LEDs



24W / 30W



24V



DMX512 and Dali Driver



5°, 10°, 25°, 45°, 60°, 90° & 10°- 60°, 20°- 40°



1820lm @ 4000K



Silver Aluminum, Grey, Black, Customized



Optional Dimming



5 Years Warranty





80% after 50,000 Hours



-30°C to 50°C






FOLI-AAP6538-LED




Linear LED Lighting with a simple and efficient design ideal for all interior projects such as hotel, villas, clubs, opera houses, museums, exhibition centers, stores, boutiques, homes, etc.

All linear products are eco-friendly with low energy consumption and excellent thermal management allowing energy savings and longer life.

Surface mounted fitting with adjustable bracket. The body is aluminum alloy with die-cast end caps completed with silicone seal. The optical screen is clear glass – 4mm thick. The fitting is equipped with two nickel-finished brass glands and neoprene cable for daisy-chain connection.

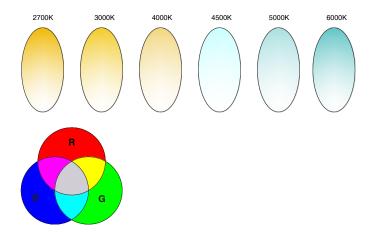

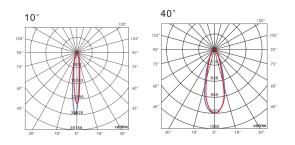



36pcs high power Cree LEDs



48W / 72W



24V



DMX512 and Dali Driver



5°, 10°, 25°, 45°, 60°, 90° & 10°- 60°, 20°- 40°



3660lm @ 48W / 4000K



Silver Aluminum, Grey, Black, Customized



Optional Dimming



5 Years Warranty





80% after 50,000 Hours



-30°C to 50°C






FOLI-GGM3369-LED




Linear LED Lighting with a simple and efficient design ideal for all interior projects such as hotel, villas, clubs, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.

All linear products are eco-friendly with low energy consumption and excellent thermal management allowing energy savings and longer life.

Surface mounted fitting with adjustable bracket. The body is aluminium alloy with die-cast end caps completed with silicone seal. The optical screen is clear glass – 4mm thick. The fitting is equipped with two nickel-finished brass glands and neoprene cable for daisy-chain connection

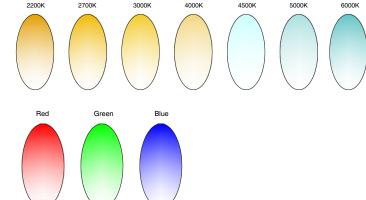







24V







Silver Aluminum, Grey, Black, Customized







Oos.

-30°C to 50°C






FOLI-GGL53109-LED





105 53 O Linear LED Lighting with a simple and efficient design ideal for all interior projects such as hotel, villas, clubs, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.

All linear products are eco-friendly with low energy consumption and excellent thermal management allowing energy savings and longer life.

Surface mounted fitting with adjustable bracket. The body is aluminium alloy with die-cast end caps completed with silicone seal. The optical screen is clear glass – 4mm thick. The fitting is equipped with two nickel-finished brass glands and neoprene cable for daisy-chain connection.

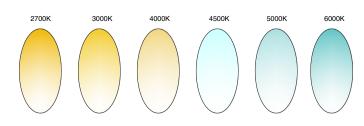



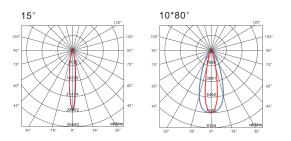



24 / 30 / 36pcs high power Cree LEDs



36W / 48W / 60W



AC110-230V



DMX512 and Dali Driver



5°, 10°, 25°, 45°, 60°, 90° & 10°- 60°, 20°- 40°



4738lm @ 60W / 4000K



Silver Aluminum, Grey, Black, Customized



Optional Dimming



5 Years Warranty





80% after 50,000 Hours



-30°C to 50°C





FOLI-GGP6787-LED





67


Linear LED Lighting with a simple and efficient design ideal for all interior projects such as hotel, villas, clubs, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.

All linear products are eco-friendly with low energy consumption and excellent thermal management allowing energy savings and longer life.

Surface mounted fitting with adjustable bracket. The body is aluminium alloy with die-cast end caps completed with silicone seal. The optical screen is clear glass – 4mm thick. The fitting is equipped with two nickel-finished brass glands and neoprene cable for daisy-chain connection.

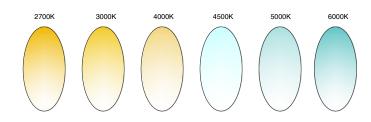



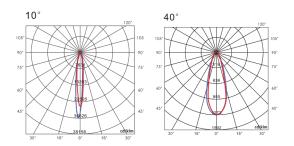



36 / 48 high power Cree LEDs



48W / 72W



AC110-230



DMX512 and Dali Driver



5°, 10°, 25°, 45°, 60°, 90° &10°- 60°, 20°- 40°



5685lm @ 72W / 4000K



Silver Aluminum, Grey, Black, Customized



Optional Dimming



5 Years Warranty





80% after 50,000 Hours



-30°C to 50°C





FOLI-BBL4055-LED





88 40

Linear LED Lighting with a simple and efficient design ideal for all interior projects such as hotel, villas, clubs, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.

All linear products are eco -friendly with low energy consumption and excellent thermal management allowing energy savings and longer life.

Wall or ceiling recessed mounted fitting. The body is aluminium alloy with aluminium end caps complete with silicone seal. The optical acrylic diffuser delivers soft and smooth light.

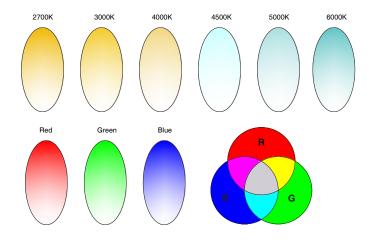




























FOLI-CCL3062-LED




Linear LED Lighting with a simple and efficient design ideal for all interior projects such as hotel, villas, clubs, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.

All linear products are eco-friendly with low energy consumption and excellent thermal management allowing energy savings and longer life.

Wall or ceiling recessed mounted fitting. The body is aluminium alloy with aluminium end caps complete with silicone seal. The optical acrylic diffuser delivers soft and smooth light.

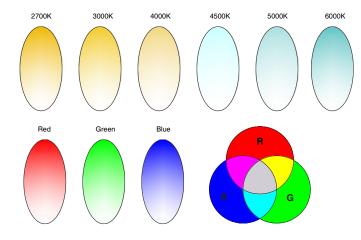

























FOLI-CCL2160-LED





21

Linear LED Lighting with a simple and efficient design ideal for all interior projects such as hotel, villas, clubs, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.

All linear products are eco -friendly with low energy consumption and excellent thermal management allowing energy savings and longer life.

Wall or ceiling recessed mounted fitting. The body is aluminium alloy with aluminium end caps complete with silicone seal. The optical acrylic diffuser delivers soft and smooth light.

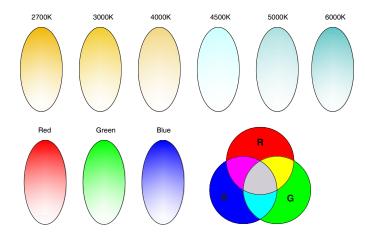











≰ 480lm @ 3000K



Silver Aluminum, Grey, Black, Customized



Optional Dimming



5 Years Warranty





80% after 50,000 Hours



-30°C to 50°C





FOLI-KO3267-LED







Linear LED Lighting with a simple and efficient design ideal for all interior projects such as hotel, villas, clubs, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.

All linear products are eco-friendly with low energy consumption and excellent thermal management allowing energy savings and longer life.

A recessed box for pre-installation. The body is aluminium alloy with aluminium end caps complete with silicone seal. The optical screen is frosted glass – 6mm thick, delivering soft and smooth light. The fitting is equipped with two nickel-finished brass glands and neoprene cable for daisy-chain connection.

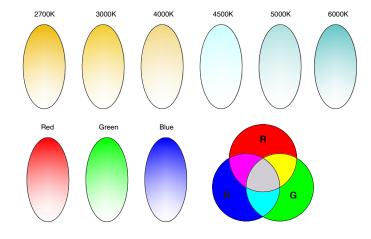
























FOLI-HHI6180-LED

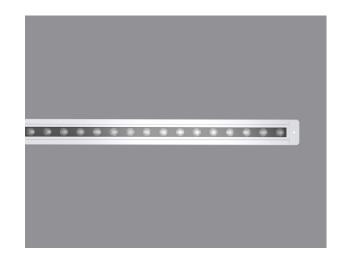



61

Linear LED Lighting with a simple and efficient design ideal for all interior projects such as hotel, villas, clubs, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.

All linear products are eco -friendly with low energy consumption and excellent thermal management allowing energy savings and longer life.

A recessed box for pre-installation. The body is aluminium alloy with aluminium end caps complete with silicone seal. The optical screen is frosted glass – 6mm thick, delivering soft and smooth light. The fitting is equipped with two nickel-finished brass glands and neoprene cable for daisy-chain connection.

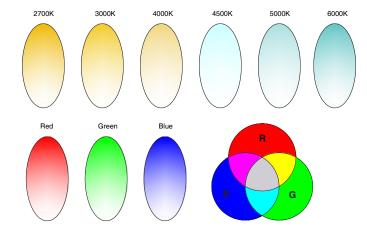

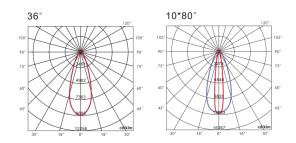



24pcs high power Cree LEDs



24W / 36W



24V



DMX512 and Dali Driver



5°, 10°, 25°, 45°, 60°, 90° & 10°- 60°, 20°- 40°



1760lm @ 24W / 4000K



Silver Aluminum, Grey, Black, Customized



Optional Dimming



5 Years Warranty





80% after 50,000 Hours




-30°C to 50°C





FOLI-GGR19860-24-LED







Linear LED Lighting with a simple and efficient design ideal for all exterior spaces of hotels, villas, clubs, opera houses, museums, exhibition centres, stores, boutiques, etc.

All linear products are eco -friendly with low energy consumption and excellent thermal management allowing energy savings and longer life.

This product has extruded aluminium housing with powder coating finishing to protect against corrosion. Different Beam Angle options from narrow spot projection to wide flood lighting application. All external screws are in stainless steel.

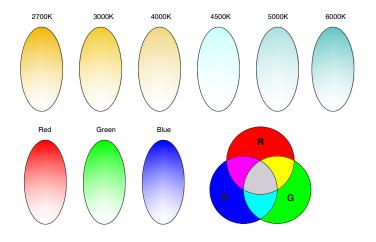

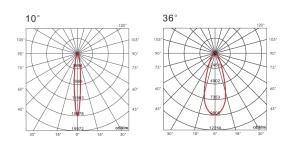



24pcs LEDs



30W / 40W



AC 220V



DMX512 and Dali Driver



6°, 15°, 30°, 45°, 60° and 3°, 5°, 20° - 40°

C€



Optional Dimming



5 Years Warranty



80% after 50,000 Hours




-30°C to 50°C





FOLI-GGR19860-36-LED







Linear LED Lighting with a simple and efficient design ideal for all exterior spaces of hotels, villas, clubs, opera houses, museums, exhibition centres, stores, boutiques, etc.

All linear products are eco-friendly with low energy consumption and excellent thermal management allowing energy savings and longer life.

This product has extruded aluminium housing with powder coating finishing to protect against corrosion. Different Beam Angle options from narrow spot projection to wide flood lighting application. All external screws are in stainless steel.

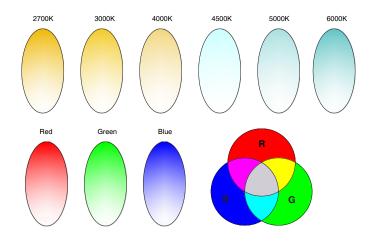

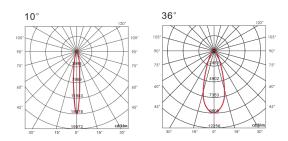



36pcs LEDs



50W / 60W



AC 220V



DMX512 and Dali Driver



6°, 15°, 30°, 45°, 60° and 3°, 5° and 20°- 40°

C€



Optional Dimming



5 Years Warranty





80% after 50,000 Hours



-30°C to 50°C





FOLI-GGR19860-24-LED





390

Linear LED Lighting with a simple and efficient design ideal for all exterior spaces of hotels, villas, clubs, opera houses, museums, exhibition centres, stores, boutiques, etc.

All linear products are eco-friendly with low energy consumption and excellent thermal management allowing energy savings and longer life.

This product has extruded aluminium housing with powder coating finishing to protect against corrosion. Different Beam Angle options from narrow spot projection to wide flood lighting application. All external screws are in stainless steel.

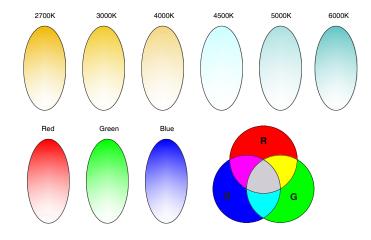

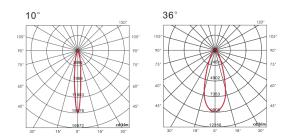



48pcs LEDs



80W / 90W



AC 220V



DMX512 and Dali Driver



6°, 15°, 30°, 45°, 60° and 3°, 5°, 20° - 40°

C€



Optional Dimming



5 Years Warranty

-30°C to 50°C



80% after 50,000 Hours




00 /0 dittel 30/000 illod







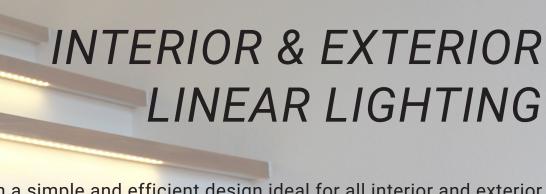


Linear LED Lighting with a simple and efficient design ideal for all interior and exterior projects such as: hotel, villas, clubs, opera houses, museums, exhibition centres, stores, boutiques, homes, etc.

All linear products are eco -friendly with low energy consumption and excellent thermal management allowing energy savings and longer life.

FOLILED FLEXI STRIP 16.7MM




- Flexible strip with 16.7mm pitch (60 LEDs per meter)
- Custom lengths up to 5 meters (50mm at 12V & 100mm at 24V)
- Various colour temperature options
- Life expectancy of 50,000 hours
- 3 years' warranty
- IP20 to IP68 Protection with silicone tube & internal silicone glue fill
- Optional white, brown or black PCB
- Low energy consumption
- Operation temperature: -20° to +50°C
- Adhesive back easy to peel and stick
- Can be supplied on bar

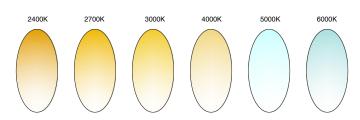



460 - 570 lm











LED BAR - CONNECTION

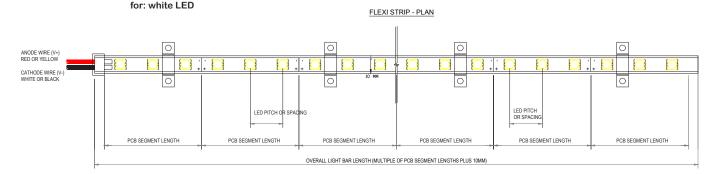

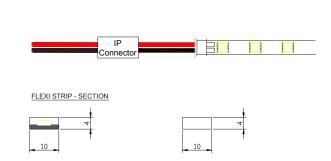



1.0 0.9 0.8

0.7 0.6 0.5 0.4 0.3 0.2 0.0

relative intensity

www.foliled.com

wave length (nm)

FOLILED FLEXI STRIP 8.3MM



- Flexible strip with 8.3mm pitch (60 LEDs per meter)
- Custom lengths up to 5 meters (50mm at 24V) Various colour temperature options
- Life expectancy of 50,000 hours
- 3 years' warranty
- IP20 to IP68 Protection with silicone tube & internal silicone glue fill
- Optional white, brown or black PCB
- Low energy consumption
- Operation temperature: -20° to +50°C
- Adhesive back easy to peel and stick
- Can be supplied on bar






















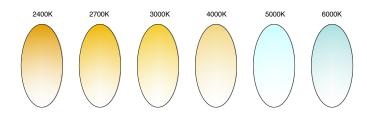



FLEXI STRIP - PLAN ANODE WIRE (V+ WHITE OR BLACK 0 LED PITCH OR SPACING PCR SEGMENT LENGTH PCB SEGMENT LENGTH PCR SEGMENT LENGTH PCR SEGMENT LENGTH PCR SEGMENT LENGTH PCR SEGMENT LENGTH OVERALL LIGHT BAR LENGTH (MULTIPLE OF PCB SEGMENT LENGTHS PLUS 10MM

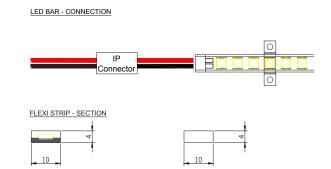




FOLILED FLEXI STRIP 8.3MM





- Flexible strip with 8.3mm pitch (60 LEDs per meter)
- Custom lengths up to 5 meters (25mm at 12V & 50mm at 24V) Various colour temperature options
- Life expectancy of 50,000 hours
- 3 years' warranty
- IP20 to IP68 Protection with silicone tube & internal silicone glue fill
- Optional white, brown or black PCB
- Low energy consumption
- Operation temperature: -20° to +50°C
- Adhesive back easy to peel and stick
- Can be supplied on bar

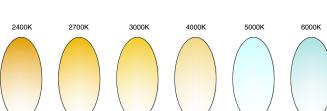



















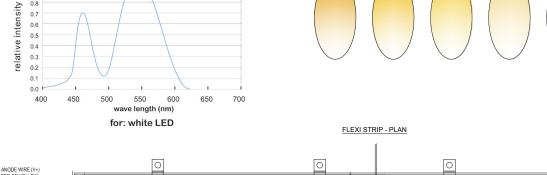

LED PITCH OR SPACING

PCB SEGMENT LENGTH

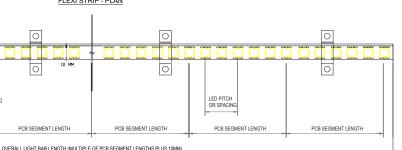

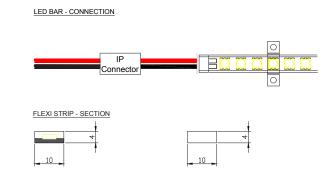



CATHODE WIRE (V

1.0 0.9

0.7

www.foliled.com


PCB SEGMENT LENGTH


FOLILED FLEXI STRIP 16.7MM RGB+W




- Flexible strip with 16.7mm pitch
- Custom Length up to 5meters (100mm at 12V & 200mm at 24V)
- Life expectancy of 50,000 hours
- 3 years' warranty
- IP20 to IP68 Protection with silicone tube & internal silicone glue fill
- · Optional white, brown or black PCB
- 120° beam angle
- Low energy consumption
- Operation temperature: -20° to +50°C
- · Adhesive back easy to peel and stick
- · Can be supplied on bar



















LED BAR - CONNECTION

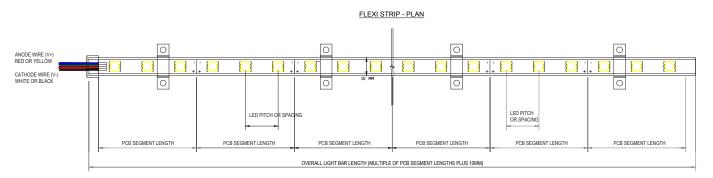

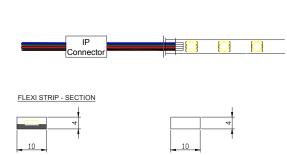


FOLILED FLEXI STRIP 16.7MM




1.0 0.9 0.8 relative intensity 0.7 0.6 0.5 0.4 0.3 0.2 0.0 600 400 550 wave length (nm) for: white LED

- Flexible strip with 16.7mm pitch (120LEDs per meter)
- Custom Length up to 5 meters (25mm at 12V & 50mm at 24V)
- Various colour temperature options
- Life expectancy of 50,000 hours
- 3 years' warranty
- IP20 to IP68 Protection with silicone tube & internal silicone glue fill
- Optional white, brown or black PCB
- 120° beam angle
- Low energy consumption
- Operation temperature: -20° to +50°C
- Adhesive back easy to peel and stick
- Can be supplied on bar

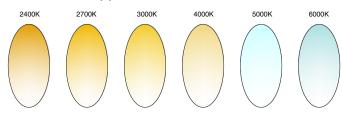















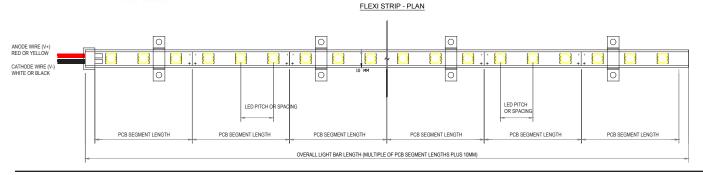

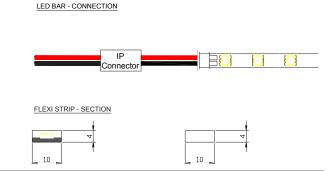





FOLILED RIGID BAR 16.7MM




- Rigid bar with 16.7mm pitch
- Custom length in multiples of 50mm PCB segment lengths up to 2 meter
- Various colour temperature options
- 3 years' warranty
- · Excellent thermal management
- · Clear of frosted diffuser cover
- · Available with IP20 or IP68 connectors
- 120° beam angle
- · Low energy consumption
- Ambient operation temperature: -20° to 50°C









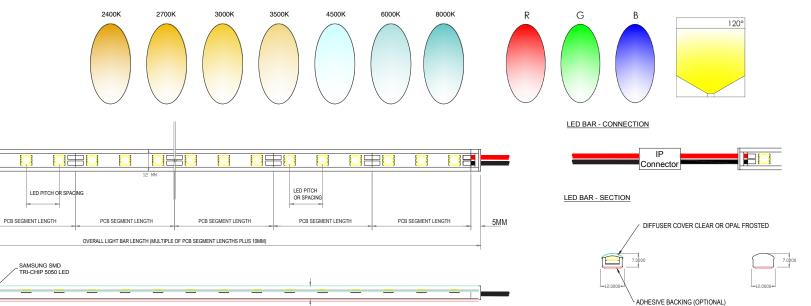

7MM

5MM.


PCB SEGMENT LENGTH

LED BAR - PLAN

ANODE WIRE (V+) RED OR YELLOW CATHODE WIRE (V-


LED BAR - SIDE ELEVATION

FOLILED RIGID BAR 8.3MM

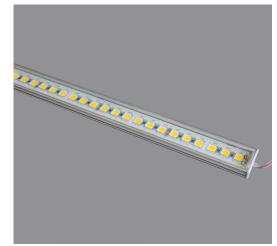


- · Rigid bar with 8.3mm pitch
- Custom length in multiples of 50mm PCB segment lengths up to 1.2 meter
- Various colour temperature options
- 3 years' warranty
- · Excellent thermal management
- · Clear of frosted diffuser cover
- Available with IP20 or IP68 connectors
- 120° beam angle
- · Low energy consumption
- Ambient operation temperature: -20° to 50°C










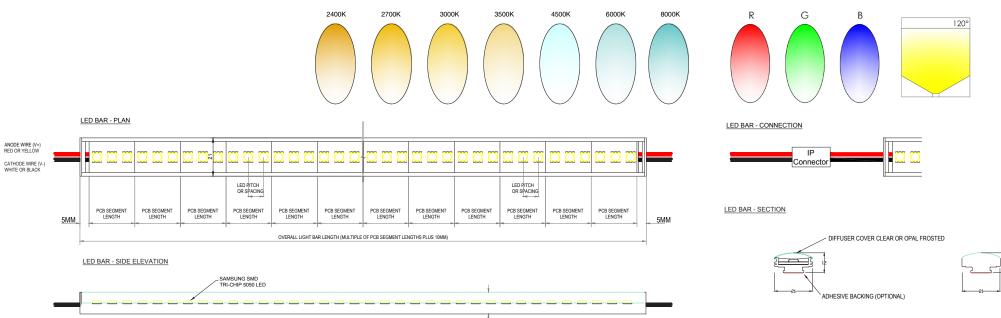

12MM




FOLILED RIGID BAR 16.7MM RGB

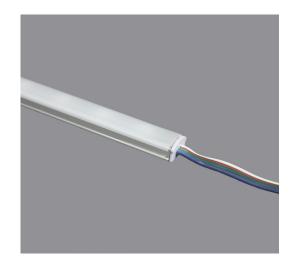


- Rigid bar with 16.7mm pitch
- Custom lengths in multiples of 50mm PCB segment lengths up to 2 meter
- · Various colour temperature options
- · 3 years' warranty
- · Excellent thermal management
- · Clear of frosted diffuser cover
- Available with IP20 or IP68 connectors
- 120° beam angle
- · Low energy consumption
- Ambient operation temperature: -20° to 50°C



















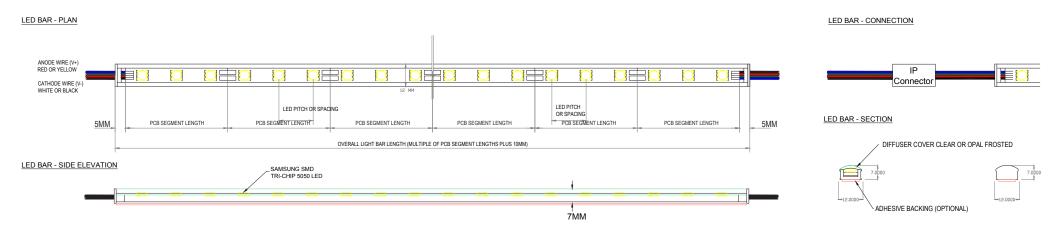


FIXINGS





Metal fixed clips.

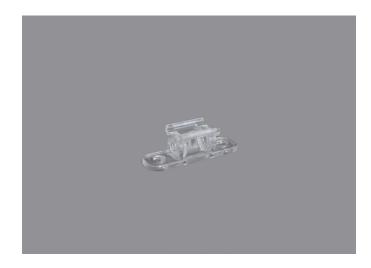


Adjustable plastic clip.









Fixed clip on 16.7mm pitch bar.

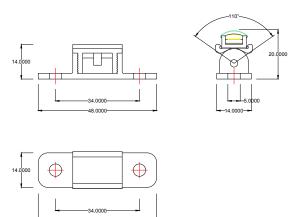


Adjustable clip on 16.7mm pitch bar.







Fixed clip on 8.3mm pitch bar.

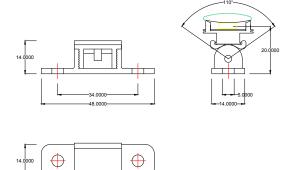



Adjustable clip on 8.3mm pitch bar.




HOUSING












Profile Housing 5051

Suitable for FoliLED Flexi strip and FoliLED Rigid Bar.









Profile Housing 3051

Suitable for FoliLED Flexi strip and FoliLED Rigid Bar.


Housing Profile LL23-8



23.1

Aluminium housing profiles perfectly suited for our LED strips. Simply choose the one that best suits your installation, whether that is supplementary lighting, backlighting, cabinet lighting or guide lighting.

All aluminium profiles are available with a choice of diffuser cover: Clear, Opal or Frosted. The opal cover diffuses the light across the cover nicely, whereas the frosted cover is more transparent. All profiles are supplied with a pair of end caps and mounting clips. Extra end caps and mounting clips are available separately.

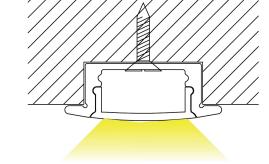

ITEM DESCRIPTION:

MATERIAL: Anodised Aluminium

COVER: PMMA opal matte cover, PMMA semi clear cover, PMMA clear cover

TYPE: Recessed Mounted

RECOMMENDED LED STRIP: 60LED/s, 14W/m

ITEM COMPONENTS:









INSTALLATION EXAMPLE:










Housing Profile LL17-8





Aluminium housing profiles perfectly suited for our LED strips. Simply choose the one that best suits your installation, whether that is supplementary lighting, backlighting, cabinet lighting or guide lighting.

All aluminium profiles are available with a choice of diffuser cover: Clear, Opal or Frosted. The opal cover diffuses the light across the cover nicely, whereas the frosted cover is more transparent. All profiles are supplied with a pair of end caps and mounting clips. Extra end caps and mounting clips are available separately.

ITEM DESCRIPTION:

MATERIAL: Anodised Aluminium

COVER: PMMA opal matte cover, PMMA semi clear cover, PMMA clear cover


TYPE: Recessed/Surface Mounted

RECOMMENDED LED STRIP: 60LED/s, 14W/m

ITEM COMPONENTS:









INSTALLATION CLIPS:










Housing Profile LL17-8





Aluminium housing profiles perfectly suited for our LED strips. Simply choose the one that best suits your installation, whether that is supplementary lighting, backlighting, cabinet lighting or guide lighting.

All aluminium profiles are available with a choice of diffuser cover: Clear, Opal or Frosted. The opal cover diffuses the light across the cover nicely, whereas the frosted cover is more transparent. All profiles are supplied with a pair of end caps and mounting clips. Extra end caps and mounting clips are available separately.

ITEM DESCRIPTION:

MATERIAL: Anodised Aluminium

COVER: PMMA opal matte cover, PMMA semi clear cover, PMMA clear cover

TYPE: Recessed/Surface Mounted

RECOMMENDED LED STRIP: 60LED/s , 14W/m

ITEM COMPONENTS:







INSTALLATION CLIPS:










NOTES

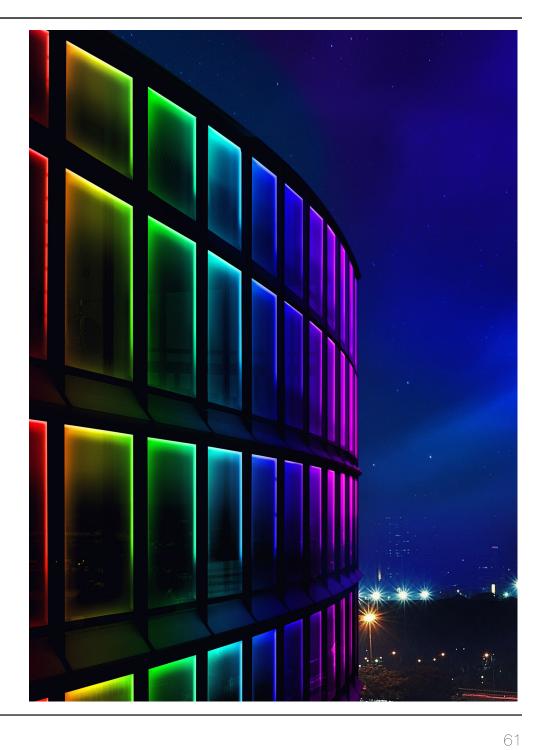

NOTES

WE QUOTE! WEDESICN! WE PRIDE OURSELVES CUSTOMER SERVICE!

