




## Rana Bar 14.4W

### Features

- SMD 5050 LEDs with 16.7mm pitch
- IP68 as standard
- Custom Lengths in multiples of 50mm PCB segment from 1110mm to 2010mm
- Operating ambient temperature -20° to +50°C
- 50,000 hours lamp life at 50°C
- 120° beam angle
- CRI > 80
- Lumen Output 1700lm/m (@ 3000K)

### Lens




### Driver

To run 4 x 1010mm bars in series please use 1 x 60W, 0-10V dimmable driver.



### Product Dimensions

All of the measurements for product are in mm.

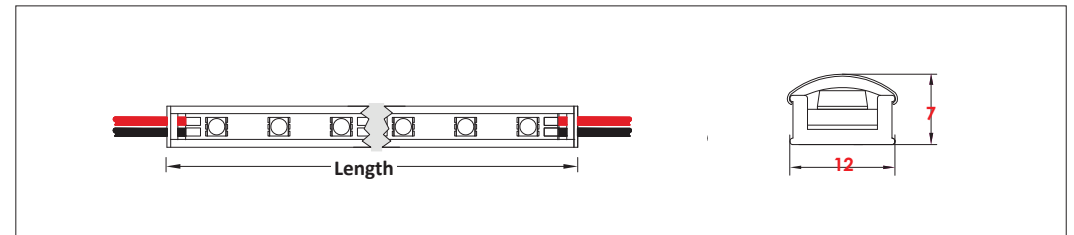

### Available Options

| Voltage  | Control             | Colour Temperature | Diffuser     | Clips          |                   |
|----------|---------------------|--------------------|--------------|----------------|-------------------|
| 12V - 12 | Dimmable 1-10 - DIM | ● 2700 - 27        | ● Red - RD   | ○ Clear - CL   | ○ Fixed - F1      |
| 24V - 24 | Dali - DI           | ● 3000 - 30        | ● Green - GN | ○ Frosted - FR | ○ Adjustable - F2 |
|          |                     | ● 3500 - 35        | ● Blue - BL  |                |                   |
|          |                     | ○ 4000 - 40        |              |                |                   |
|          |                     | ○ 4500 - 45        |              |                |                   |
|          |                     | ○ 6000 - 60        |              |                |                   |
|          |                     | ○ 6500 - 65        |              |                |                   |
|          |                     | ○ 7000 - 70        |              |                |                   |

### Luminaire order code example

| Code   | Voltage | Control | Colour Temp. | Diffuser | Clips |
|--------|---------|---------|--------------|----------|-------|
| RB14.4 | 12V     | DIM     | 30           | CL       | F2    |

Example: RB14.4-12-DIM-30-CL-F2

### Assembly brackets & accesories

