Rana Bar 28.8W

Features

- SMD 5050 LEDs with 8.3mm pitch
- IP68 as standard
- Custom Lengths in multiples of 25mm PCB segment from 110mm to 1210mm
- Operating ambient temperature -20º to +50ºC
- 50,000 hours Lamp life at 50ºC
- 120° beam angle
- CRI > 80
- Lumen Output 3400lm/m (@ 3000K)

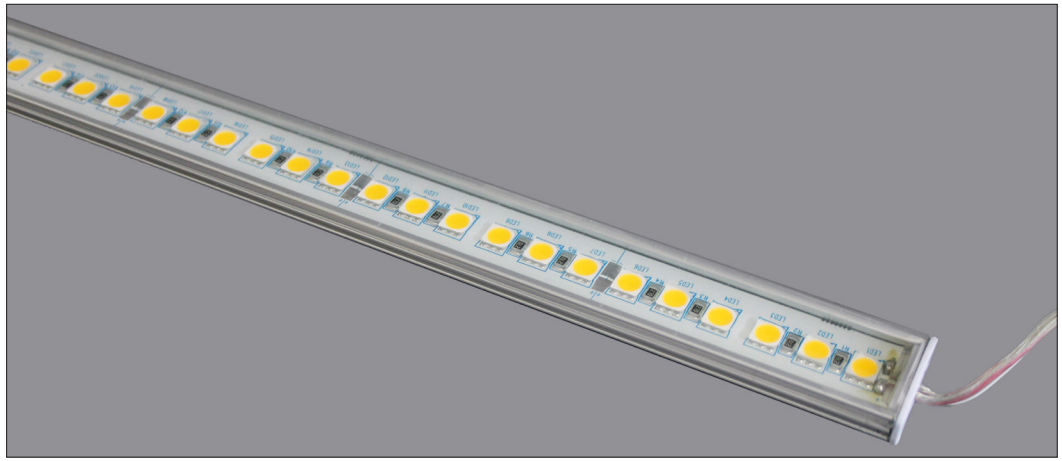

Lens



Driver

To run 2 x 1000mm bars in series please use 1 x 60W, 0 -10V dimmable driver.

Product Dimensions

All of the measurements for product are in mm.

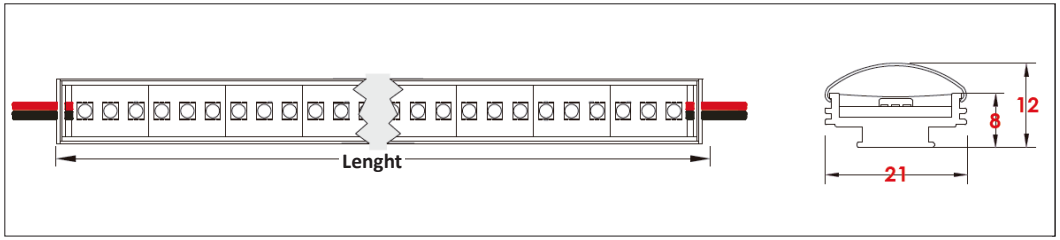

Available Options

Voltage	Control	Colour Temperature		Diffuser	Clips
12V - 12 24V - 24	Dimmable 1-10 - DIM Dali - DI	2700 - 27 3000 - 30 3500 - 35 4000 - 40 4500 - 45 6000 - 60 6500 - 65 7000 - 70	Red - RD Green - GN Blue - BL	Clear - CL Frosted - FR	Fixed - F1 Adjustable - F2

Luminaire order code example

Code	Voltage	Control	Colour Temp.	Diffuser	Clips
RB28.8	12V	DIM	30	CL	F2

Example: RB28.8-12-DIM-30-CL-F2

Assembly brackets & accesories

Metal Fixed Clip



Metal Fixed Clip

Plastic Adjustable Clip



Plastic Adjustable Clip